

Combination Devices



GMA-2415-W

FEATURES:

- Terminal screws backed out ready for wiring
- Side wire terminals accept #12 or #14 AWG Cu solid or stranded wire
- All devices fit standard wallboxes and are suitable for ganging

Combination Devices 15AMP Side Wired Only 120V AC

DESCRIPTION	CAT.N O.	CO LOR
Two Single-Pole Switches	GMA-2415-I	Ivory
	GMA-2415-W	White
	GMA-2415-BR	Brown



GMA-2515A-W


15AMP Side Wired Only Pilot Light 120V AC

DESCRIPTION	CAT.N O.	CO LOR
Single-Pole Switch/Pilot Light	GMA-2515AL-I	Ivory
	GMA-2515AL-W	White

Contains exclusive circuit-pilot light on when load is off.

15AMP 120V AC Switch 15 AMP 125V Receptacle

DESCRIPTION	CAT.N O.	CO LOR
Single-Pole Switch/Receptacle	GMA-2515A-I	Ivory
	GMA-2515A-W	White
	GMA-2515A-BR	Brown

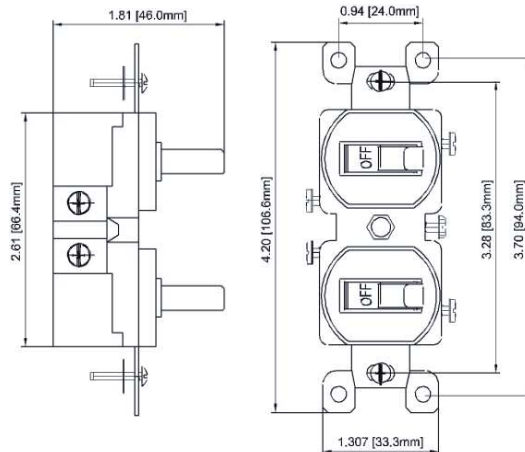

TESTING & CODE COMPLIANCE:

- UL Listed
- ISO9001 registered manufacturing facility

MATERIAL CHARACTERISTICS:

- Environmental: Flammability UL94, V2 Rating
- Operating Temperature: From -40°C (without impact) to 75°C maximum continuous