

GMA-216USH


Gema Devices, Riser Rated Power Limited Fire Alarm Cable, solid copper conductors AWG 16, 2 conductors, Unshield, FPLR, 305m Spool, Red.

Features:

- NEC Article 760 Type FPLR (UL: 75°C, 300v).
- Designed to meet UL 1666.
- RoHS Compliant.
- Fire Alarm Cable.
- FPLR (Power Limited Fire Alarm Riser Cable).
- 16 AWG 2 conductors.
- 100% Solid Bare Copper.
- Unshield.
- Executive Standard UL 1424.

Applications:

- Voice Communications.
- Smoke detectors.
- Wiring of fire alarms.
- Burglar alarms.
- Fire protective circuits.
- Suggested rating voltage: 300 volts.

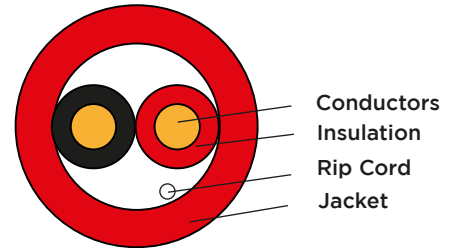

Conductors

Materials	Solid Bare Copper
Size	1/1.29±0.005 mm

Insulation

Materials	75° C PVC
Min Thickness	0.2 mm
Size	1.7±0.1 mm
Color	Red and Black

Jacket

Materials	75° C PVC
Average Thickness	0.43 mm
Size	4.3±0.2 mm
Color	Red

Physical and Electrical Properties:

- Operating Voltage: 300V.
- Operating Temperature: 75° C.
- Conductor Resistance: 13.5 Ω/Km max 20° C.
- Smoke and Fire: FPLR

